

JJ PREMIER GROUP

GUIDE NO. 02

Hurricane season, evacuation zones and the 2024 storms, explained

What an evacuation zone is, what Helene and Milton did to this coast, and what to ask about a house that was rebuilt since.

BY JOELYN NAUMAN · UPDATED NOVEMBER 4, 2026 · 9 MIN READ

JJ PREMIER GROUP · COLDWELL BANKER REALTY

Inside this guide

01 When hurricane season is

02 An evacuation zone is not a flood zone

03 How to find both for a house

04 What Helene and Milton did

05 The rule that bites after a storm

06 What to ask about a house that was rebuilt

07 Before you make an offer

08 Your storm notes for one house

01

When hurricane season is

The Atlantic hurricane season runs from June 1 to November 30. The busiest part is late summer and early fall.



Picture the calendar. Storms can form in June. They get more common in August. The peak of the season is September 10. Most storms come between the middle of August and the middle of October.

For a home purchase, the season matters in one practical way. The trigger is a tropical storm or hurricane watch or warning. It can be for any part of Florida. When the National Weather Service issues one, Citizens stops binding new policies. Private insurers have rules of their own.


> ### Bind
>
> When an insurer agrees in writing to cover you from a set date. Until a policy is bound, you're not covered.
>
> **SOURCE** Citizens Property Insurance Corporation, What is Citizens' hurricane or tropical storm binding suspension rule?

A closing that needs a new policy can wait days for the all-clear. So from June on, build that into the contract dates, and bind the policies early.

FIG. 01 · THE YEAR

Hurricane season on one calendar

The shaded part is the season. The hatched part is the busiest stretch. The numbered lines are three dates.

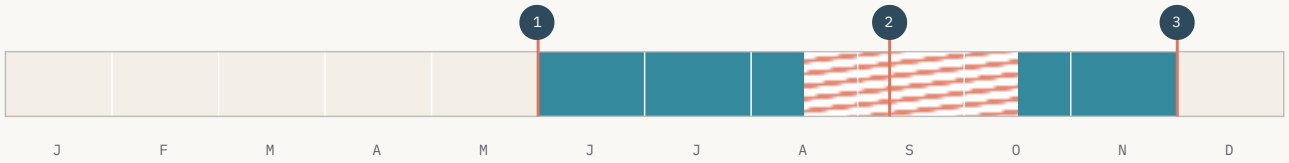

1. **June 1.** The season opens.
2. **September 10.** The peak of the season.
3. **November 30.** The season closes.

Hurricane season, June 1 to November 30 — The busiest stretch, mid-August to mid-October

SOURCE National Hurricane Center, Tropical cyclone climatology

02

An evacuation zone is not a flood zone

The two maps answer different questions. A house can be outside FEMA's flood zone and still inside an evacuation zone.

The county draws the evacuation zones. Its emergency managers model how high salt water could push inland in a hurricane, by address. The zones are lettered. Zone A is the most exposed and is called first. The letters run to E in both counties.

A flood zone is FEMA's map for flood insurance. It covers flooding from any source. It's the map your lender and your builder follow.

VE, AE and X

The flood zones you'll see most on this coast. VE is the highest risk: the beach and the open bay, where storm waves can be 3 feet or more. AE is high risk: land the big flood is expected to cover. That flood has a 1 in 100 chance each year. X is lower risk: land above it.

SOURCE FEMA, Features of flood insurance rate maps in coastal areas (checked November 4, 2026)

Manatee County says it plainly. Evacuation levels are not the same as flood zones, and they don't match a storm's category. The zones are about the water, not the wind.

The state's Know Your Zone page shows the letters A to F. Manatee and Sarasota use A to E. Zone A is called first in both.

FIG. 02 · TWO MAPS

The two maps answer different questions

Read each side. Look up both for any house near the water.

THE EVACUATION ZONE DECIDES

Whether officials call your street to leave

- Drawn by the county from storm surge, by address
- Lettered A to E. Zone A is called first
- Not tied to a storm's category

THE FLOOD ZONE DECIDES

Flood insurance and building rules

1. Drawn by FEMA for flooding from any source
2. VE or AE: a mortgage from a government-backed lender requires flood insurance
3. New homes must be built above the big flood

SOURCE Manatee County, Know your evacuation level; Florida Division of Emergency Management, Know Your Zone; FEMA, Flood zones; FEMA, Flood insurance

03

How to find both for a house

Look up the exact address twice. Once for the evacuation zone, once for the flood zone.

Start with the county. In Manatee County, the Learn Your Level map takes an address and shows the evacuation level. In Sarasota County, the Know Your Evacuation Level page links to the county's lookup.

Then look up the flood zone on FEMA's map site. Type in the address. Write both down, with the date.

Don't go by the listing. A listing may show a zone that was typed in by hand, from an old map. The state's Know Your Zone page explains the letters for all of Florida.

FIG. 03 · WHERE TO LOOK

Three places to look up a house

The first two give the evacuation zone. The third gives the flood zone.

01

MANATEE COUNTY

Manatee County, Learn Your Level

Type in the address to see the evacuation level.

MYMANATEE.ORG

02

SARASOTA COUNTY

Sarasota County, Know Your Evacuation Level

Open the county's lookup from this page and type in the address.

SARASOTACOUNTYFL.QSCEND.COM

03

EVERY ADDRESS

FEMA Flood Map Service Center

Type in the address to see the flood zone and print a small map of that spot.

MSC.FEMA.GOV


In Sarasota County, the 311 page links to the county's lookup map.

SOURCE Manatee County, Know your evacuation level; Sarasota County 311, Know your evacuation level; FEMA Flood Map Service Center

04

What Helene and Milton did

Two storms hit this coast two weeks apart in the fall of 2024. One brought water. The other brought wind, and water too.

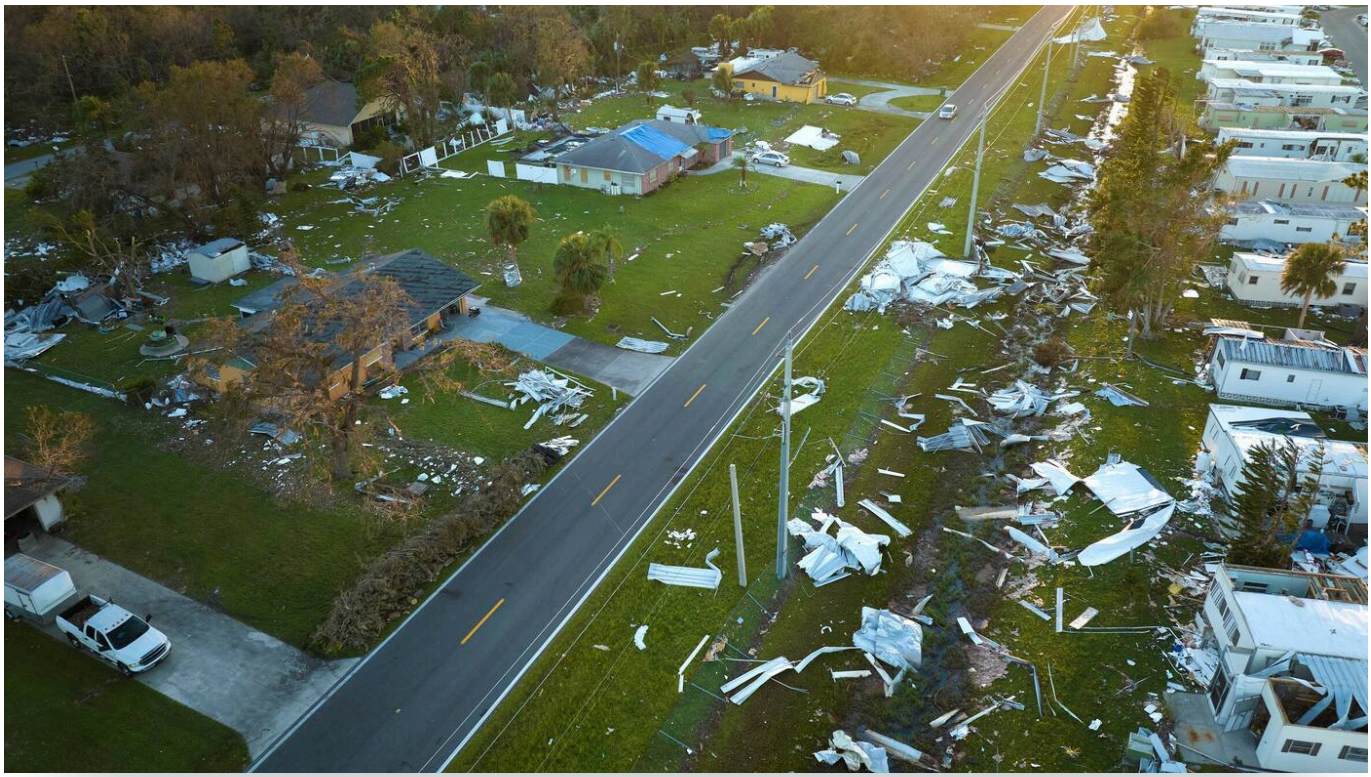

Homes in Florida after Hurricane Ian, 2022.

Helene never came ashore here. It made landfall far to the north, in the Big Bend, on the night of September 26, 2024. But it was huge. Its wind pushed the Gulf onto the land all down this coast.

From the Anclote River south to Longboat Key, the water rose 5 to 7 feet above the ground. A sensor on Longboat Key measured a storm tide of 6.68 feet above the normal high tide. From Venice to south of Englewood it rose 4 to 6 feet.

On Anna Maria Island the damage was severe. On Bradenton Beach, the surge destroyed most of the buildings. Officials put it at 90 to 95 percent. Along the Sarasota County coast, the surge damaged many homes.

Milton came two weeks later. It reached Category 5 over the Gulf. It came ashore on Siesta Key on the night of October 9, 2024. By then it was a Category 3 hurricane.

Near the landfall, from Longboat Key to Venice, the water rose 4 to 6 feet. South of Venice it rose 6 to 9 feet. The sand and debris Helene left behind made the damage worse. Milton also set off 45 tornadoes across the state.


Each storm became a federal disaster for Florida within days. For Helene that came on September 28, and for Milton on October 11.

FEMA's numbers show it. Most of the flood insurance claims paid in Florida for the two storms came from Helene. There were 49,284 claims for Helene and 16,585 for Milton.

FIG. 04 · THE WATER

How high the water rose on this coast

Each bar is one stretch of coast in one storm. The longer the bar, the higher the water.

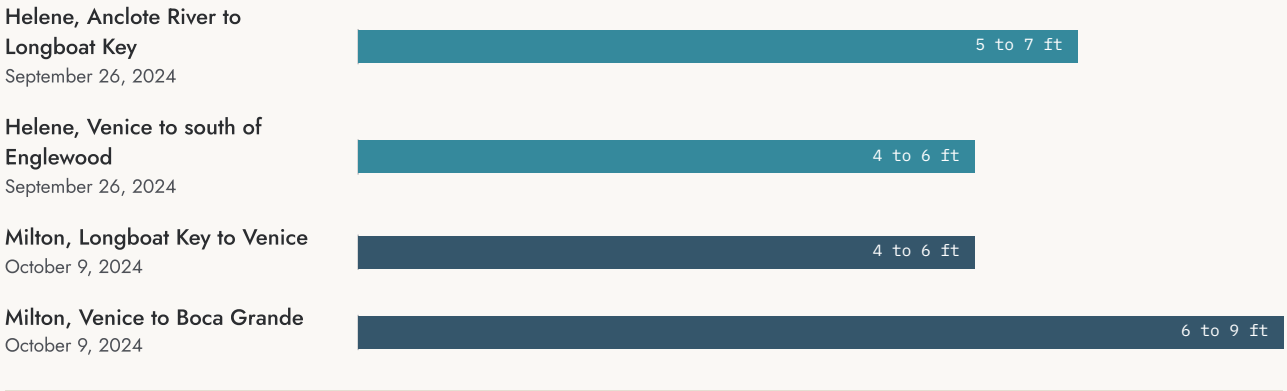

Each bar is drawn to the top of the range the Hurricane Center reports. On any one street the water was somewhere in that range, and waves rode on top.

SOURCE National Hurricane Center, Tropical cyclone reports on Hurricane Helene and Hurricane Milton

05

The rule that bites after a storm

If repairs would cost half the house's value or more, the house has to meet today's flood rules. That can mean raising it.

Substantial damage

FEMA's name for damage that costs half the building's value or more to fix. The value is what the building was worth before the damage. Manatee County uses the same words.

SOURCE FEMA, Substantial damage (glossary)

Cross that line in a flood zone, and a plain repair isn't allowed. The building must be brought up to today's rules for new construction. The county says that can be as small as raising the air conditioner, or as big as raising the whole house.


Today's rule for a new home in a flood zone is simple. The lowest floor must sit at least 1 foot above the big flood's height. That extra foot is called freeboard. Some places ask for more. FEMA says that extra foot can also mean lower flood insurance rates.

That's why, after 2024, some badly damaged houses on low lots were rebuilt higher instead of repaired. The county puts its finding in a letter, called a substantial damage determination. That letter matters as much as the contractor's bill.

FIG. 05 · TWO HOUSES

Same street after the storm: repaired, or rebuilt higher

The dashed line is how high the big flood would reach. Look at where each floor sits now.

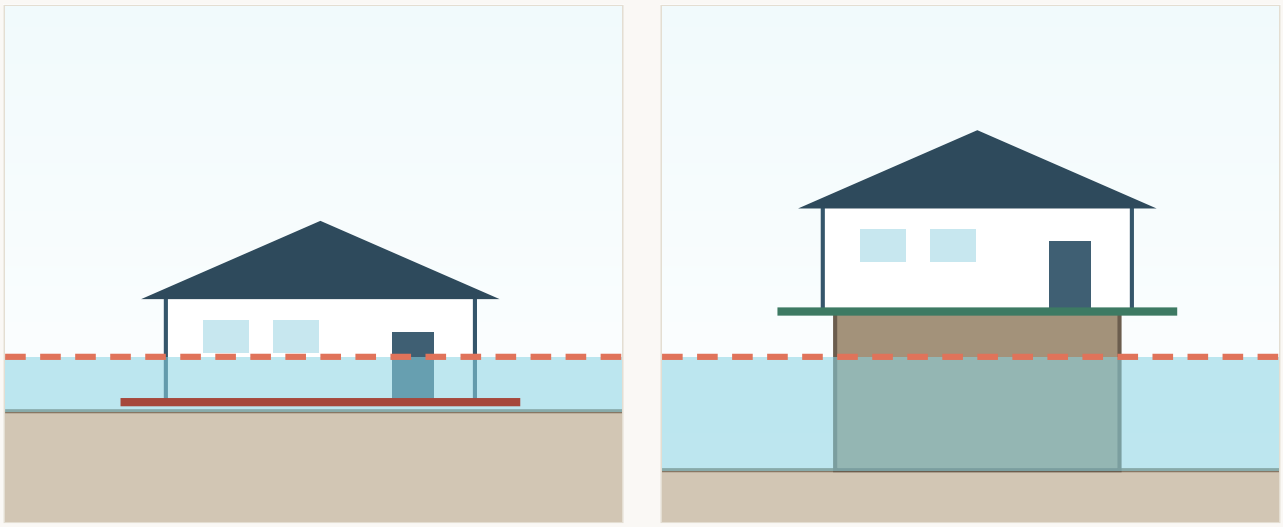

House A, repaired

Big flood height	9 ft
Lowest floor	8 ft

1 foot below the flood height

The repairs cost less than half its value, so it was fixed as it was. Its floor is still 1 foot below the big flood.

House B, rebuilt

Big flood height	9 ft
Lowest floor	10 ft

1 foot above the flood height

The repairs would have cost half its value or more, so it had to meet today's rules. Its floor is now 1 foot above the big flood.

These two houses and their heights are made up to show the rule. A real house has its own numbers, on its own elevation certificate and in the county's letter.

SOURCE The rule: FEMA, Substantial damage; Florida Building Code flood provisions, 8th edition, R322.2.1. The houses are illustrative and are not from any source

06

What to ask about a house that was rebuilt

A fresh house on an old street raises good questions. The paperwork answers them.

Ask for the permit history from the county or city building department. It shows what work was done and whether any of it was permitted as repair of substantial damage.

Ask whether the county issued a substantial damage determination, and what it required. If the floor was raised, ask for a new elevation certificate. That's the surveyor's form that shows how high the house sits.

Ask for the flood policy's claim history. And read the seller's flood form. Florida law makes the seller answer three questions. Do they know of flood damage while they owned the home? Did they file an insurance claim for flood damage? Did they get help for flood damage?

A no on that form covers only this seller's time. A house sold in 2025 may have an owner who never saw the water. Read the form next to the permit history. Keep the letter and the certificate with your closing papers. The next buyer will ask for them too.

FIG. 06 · THE QUESTIONS

Four questions for a house that was rebuilt

Ask each one. A yes isn't bad news by itself. It tells you which papers to read next.

1	**Was any of the work permitted as repair of substantial damage?** The county or city building department has the permit history.	☐ YES ☐ NO
2	**Did the county issue a substantial damage determination?** That's the county's letter. If so, ask what it required.	☐ YES ☐ NO
3	**Was the lowest floor raised?** If so, ask for a new elevation certificate.	☐ YES ☐ NO
4	**Does the seller's flood form show a claim or help for flood damage?** The seller answers three questions. A no covers only their time in the home.	☐ YES ☐ NO

SOURCE Florida Statutes 689.302 (2026); Manatee County, Floodplain management

07

Before you make an offer

Use this list each time you look at a house. The first steps take minutes.

FIG. 07 · THE CHECKLIST

Seven things to check before you make an offer

Go in order. Each step helps with the next one.

- ☐ 01 **Look up the evacuation zone**
  Use the county's lookup for the exact address.
- ☐ 02 **Look up the flood zone**
  Use FEMA's map site. It's a different map.
- ☐ 03 **Ask what the street did in 2024**
  Ask the seller, the neighbors and us. Water marks and permits tell the story.
- ☐ 04 **Get the permit history**
  From the county or city. Look for repair of substantial damage.
- ☐ 05 **Ask for the substantial damage determination and the elevation certificate**
  The determination is the county's letter. If the floor was raised, there should be a new certificate.
- ☐ 06 **Read the seller's flood form**
  Three answers, yes or no. Read it next to the permit history.
- ☐ 07 **In season, bind the insurance early**
  A watch or warning stops new policies. Build it into the contract dates.

SOURCE Each step comes from the section it sums up. The sources are listed there and at the end of this guide

08

Your storm notes for one house

Fill in the right side for the house you're looking at.

Address	Write it here
Evacuation zone	A to E, from the county
Flood zone	VE, AE or X, from FEMA
What the street did in 2024	Water height, if anyone knows it
Permit history	Checked, with any substantial damage repair
Substantial damage determination	Yes or no, and what it required
Elevation certificate	Date, and the lowest floor
Seller's flood form	Three answers, yes or no
Insurance bound by	A date before closing, and before any watch

Sources

1. National Hurricane Center, Tropical cyclone climatology
   www.nhc.noaa.gov/climo/
2. Citizens Property Insurance Corporation, What is Citizens' hurricane or tropical storm binding suspension rule?
   securesupport.citizensfla.com/app/answers/detail/a_id/1455/~/what-is-citizens-hurricane-or-tropical-storm-binding-suspension-rule%3F
3. Citizens Property Insurance Corporation, binding suspension notice of July 19, 2026
   www.citizensfla.com/-/20260719-citizens-is-under-binding-suspension
4. Manatee County, Know your evacuation level
   www.mymanatee.org/services-and-amenities/service-listing/service-details/know-your-evacuation-level
5. Florida Division of Emergency Management, Know Your Zone
   www.floridadisaster.org/knowyourzone/
6. Sarasota County, Storm evacuation zone map layer (ArcGIS feature service), zones A to E
   services3.arcgis.com/icrWMv7eBkctFu1f/arcgis/rest/services/StormEvacuationZoneWM/FeatureServer/0
7. FEMA, Flood zones (glossary)
   www.fema.gov/glossary/flood-zones
8. FEMA, Features of flood insurance rate maps in coastal areas
   www.fema.gov/flood-maps/coastal/insurance-rate-maps
9. FEMA, Flood insurance
   www.fema.gov/flood-insurance
10. Sarasota County 311, Know your evacuation level
    sarasotacountyfl.qscend.com/311/knowledgebase/article/966
11. Sarasota County, Know Your Zone lookup map (ags2.scgov.net)
12. Sarasota County, Emergency preparedness guide (PDF, on the City of Sarasota's site)
    www.sarasotafl.gov/I-Want-to/View-County-Hurricane-Preparedness-Guide
13. FEMA Flood Map Service Center
    msc.fema.gov/portal/search
14. National Hurricane Center, Tropical cyclone report, Hurricane Helene (AL092024) (PDF)
    www.nhc.noaa.gov/data/tcr/AL092024_Helene.pdf
15. National Hurricane Center, Tropical cyclone report, Hurricane Milton (AL142024) (PDF)
    www.nhc.noaa.gov/data/tcr/AL142024_Milton.pdf
16. FEMA, Florida Hurricane Helene, DR-4828-FL, declared September 28, 2024
    www.fema.gov/disaster/4828
17. FEMA, Florida Hurricane Milton, DR-4834-FL, declared October 11, 2024
    www.fema.gov/disaster/4834
18. FEMA, Florida Helene and Milton recovery fact sheet 076, February 9, 2026
    www.fema.gov/fact-sheet/florida-helene-and-milton-recovery-fact-sheet-076
19. FEMA, Substantial damage (glossary)
    www.fema.gov/about/glossary/substantial-damage
20. Manatee County, Floodplain management
    www.mymanatee.org/departments/building___development_services/floodplain_management
21. FEMA, Freeboard (glossary)
    www.fema.gov/glossary/freeboard
22. Florida Division of Emergency Management, Flood resistant provisions in the 8th edition Florida Building Code (2023), sections R322.2.1 and R322.3.2 (PDF)
    www.floridadisaster.org/globalassets/8th-ed_fbc_floodprovisions_dec20232.pdf
23. Florida Building Code, Flood resistant construction guide, 6th edition (2017) (PDF)
    www.floridabuilding.org/fbc/thecode/2017-6edition/basf_2017_flood_061217.pdf
24. Florida Statutes 689.302 (2026), Disclosure of flood risks to prospective purchaser
    www.flsenate.gov/Laws/Statutes/2026/689.302

This guide is general information about places and rules, written for Lakewood Ranch · Sarasota · Bradenton. It is not legal, insurance or tax advice, and nothing in it is a figure for any particular house.

JJ

PREMIER GROUP

Coldwell Banker Realty

Send us an address.

We'll look up both zones and get back to you as soon as we can. If you'd rather do it yourself, just follow the steps in this guide.

Joelyn Nauman
(309) 258-0225
joelyn.nauman@cbrealty.com

Jessica Garza
(941) 306-8699
jessica.garza@cbrealty.com

jjpremiergroup.com/guides/hurricane-season-evacuation-zones-and-what-changed-after-helene-and-milton

JJ Premier Group is a real estate team: Joelyn Nauman and Jessica Garza, licensed Florida real estate agents with Coldwell Banker Realty, Lakewood Ranch, FL. Real estate services are provided through Coldwell Banker Realty. Equal Housing Opportunity.